
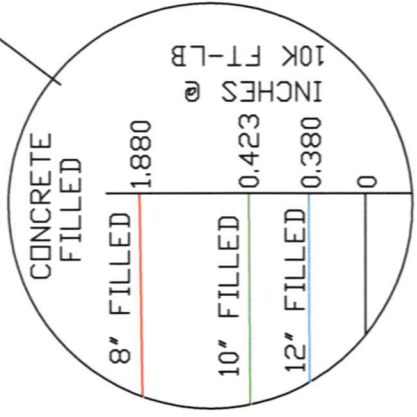


ATTACHMENT I

DEFLECTION VERSUS LOADING UNFILLED - SAND FILLED - CONCRETE FILLED FOR SEACURE PVC PILING STOCK

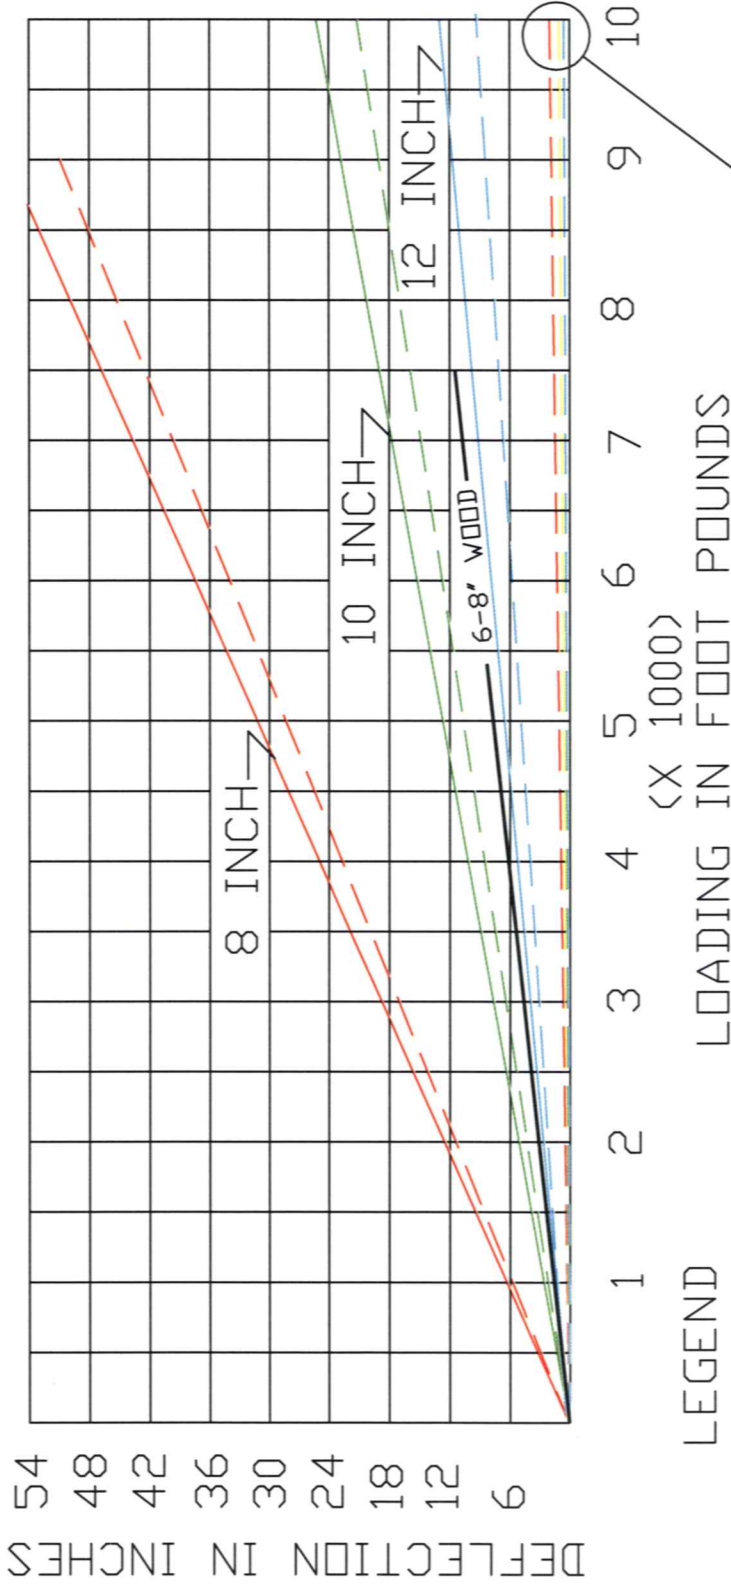

LEGEND

- 8" UNFILLED
- 10" UNFILLED
- 12" UNFILLED
- - - 8" SAND FILLED
- - - 10" SAND FILLED
- - - 12" SAND FILLED
- 8" CONCRETE FILLED
- 10" CONCRETE FILLED
- 12" CONCRETE FILLED

NOTE: BASED ON 2500 PSI CONCRETE

Deflection
-VS-
Loading

SeaCure Docking Systems Inc.
Urbanna, Virginia

CONFIDENTIAL
NOT TO BE COPIED OR REPRODUCED WITHOUT THE WRITTEN AUTHORIZATION OF SEACURE DOCKING SYSTEMS, INC.
THIS DRAWING IS THE EXCLUSIVE PROPERTY OF SEACURE DOCKING SYSTEMS, INC.
IT IS FORWARDED FOR RECIPIENT'S INFORMATION ONLY.

DATE: July 28, 2005 SCALE: DRAWN BY: PWN CHECKED BY: PROJECT NO: SDI-000050